


Connectors 88070.0000

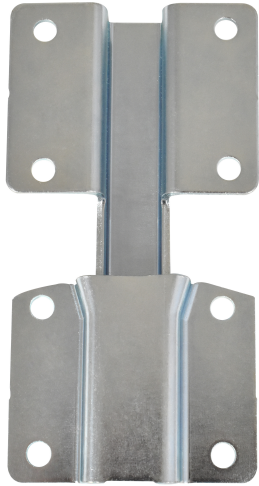

Technical data

Anchor plate with mandrel holder	65 x 109 x 2,5 mm
Base Plate Hole	4x Ø 6,5 mm
Anchor plate with mandrel holder	65 x 55 x 2,5 mm
Drilling of the anchor plate	4x Ø 6,5 mm
Total thickness when pushed together	18 mm

The Pitzl wall connector is a proven **assembly aid** that significantly simplifies the simultaneous alignment of multiple fastening points when installing wall elements. Thanks to its special geometry and long insertion path, fastening points can be positioned one after another, eliminating the need for simultaneous alignment.

The wall connector enables safe and efficient installation both during pre-assembly in the workshop and directly on the construction site. The system is field-tested, easy to handle, and contributes to time-saving and cost-effective assembly.

- Shear in insertion direction: 16.2 kN
- Shear perpendicular to insertion direction: 9.9 kN
- Tension perpendicular to insertion direction: 7.9 kN

Tested by TVFA Innsbruck, the wall connector meets all required safety and performance standards.