

Post bases 10921.1300




Technical data	
Hole Ø 12 mm at top	4
Installation height mm	277 - 342
Maximum characteristic load-bearing capacity (kN) *	100,0
Bottom plate mm	160 x 100 x 6
M 24 thread at the bottom	200
M 24 thread at the top	65
Bore Ø 13 mm at the bottom	4
Upper plate mm	Ø 100 x 6

A system for all applications! Threads of 20 to 30 mm and the most varied plate sizes with 6 to 15 mm material thickness - we have the perfect solution for any application. Lift-off and lateral impacts can be counteracted with a straight screw connection into the cross-grained wood using fully-threaded 10 x 120 mm wood screws (with European Technical Approval) or a strut or lateral latches. Of course, post bases of the right/left-threaded system are still height-adjustable when mounted and under heavy load. The use of additional lock nuts increases the rigidity of the connection.




Innovative wood connection systems
for the highest demands

Post bases 10921.1300

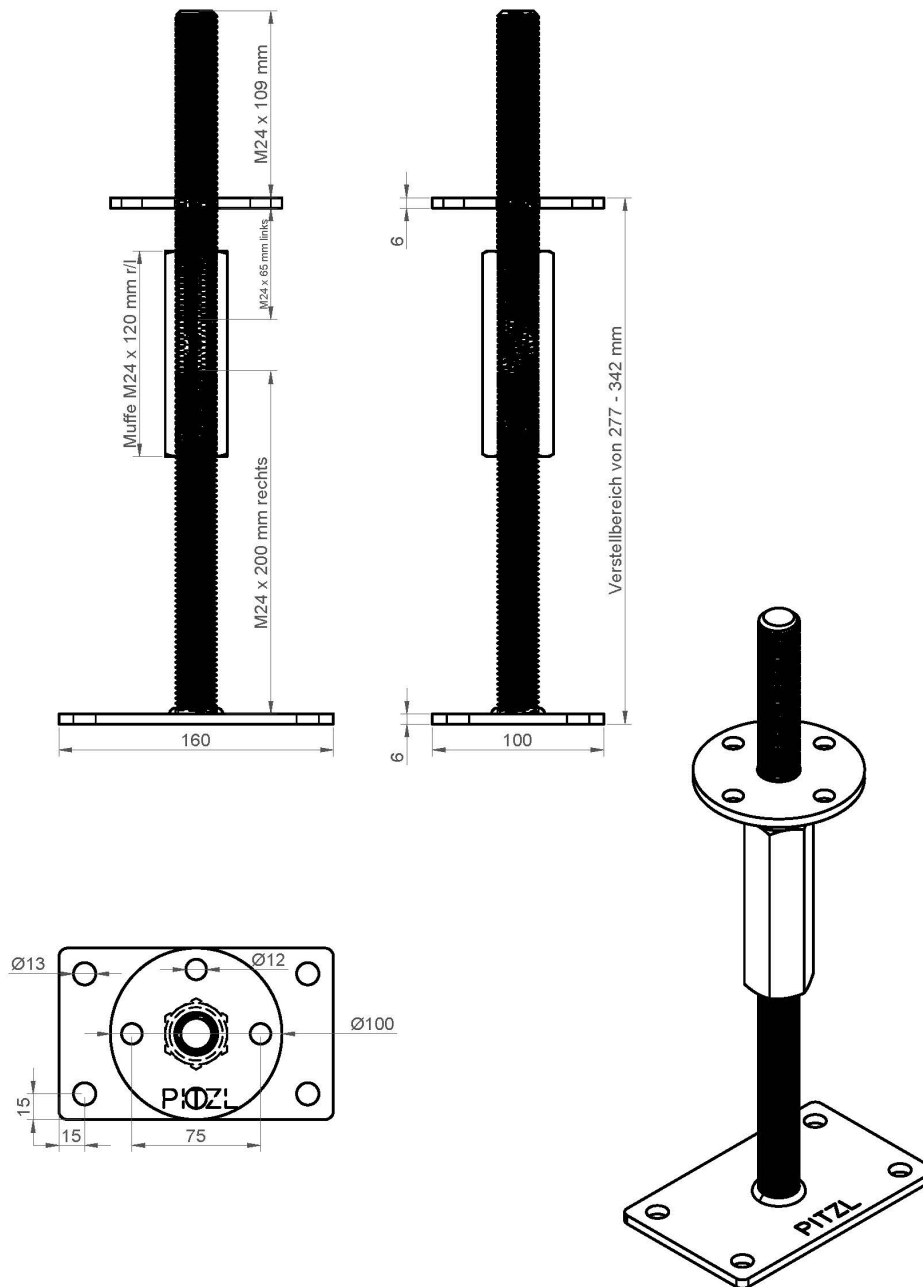

Post bases 10921.1300

Accessoires




50020.2400

Drill jig for precise
guidance of the drill bit Ø
24 mm



50934.2000

Grooving cutter Ø 20 mm



58000.0000

Milling and assembly
template for connectors
88004 - 88322



58000.1100

Milling template for FM8 Ø
100 mm